



Built-in driver

Durable and reliable power source, all in one design.



Manual Dimmer
0-10V Control Port
Input 220-240V AC




PC Cover
protect the fixture chips from the influence of growing environment


Specifications

Input Power	300W
Light Bar Qty	4 Bar
Efficacy	2.7 $\mu\text{mol/J}$
PPF	810 $\mu\text{mol/s}$
Input Voltage	220-240V AC
Voltage	1.3-1.4A
Chip	Branded LEDs
Mounting Height	$\geq 12"$ (30cm) Above Canopy
Lifetime	50,000hrs
Power Factor	$>90\%$
Colour Rendering Index	90ra
Ambient Temperature	$-25\sim 40^{\circ}\text{C}$
Control	0-10V Control
Certifications	ETL , CE , UKCA
Package Size	610x55x635mm
LED Fixture	580x580x38mm

Spectrum

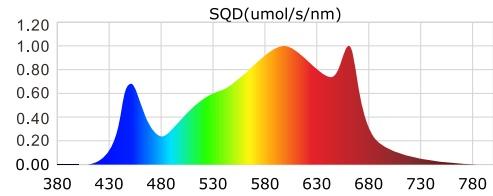

PAR Distribution

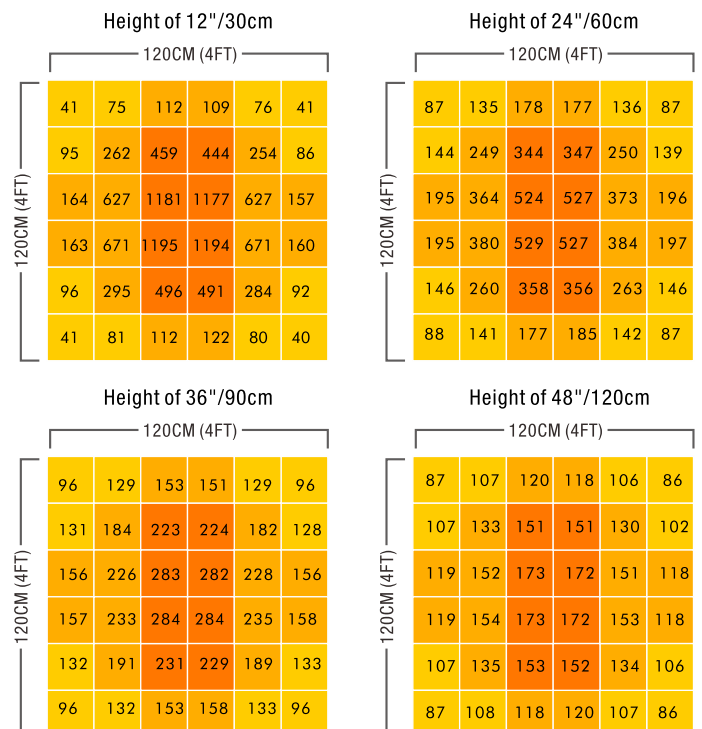



Built-in driver

Durable and reliable power source, all in one design.



Manual Dimmer
0-10V Control Port
Input 220-240V AC




PC Cover
protect the fixture chips from the influence of growing environment

Specifications

Input Power	300W
Light Bar Qty	4 Bar
Efficacy	2.9 $\mu\text{mol}/\text{J}$
PPF	870 $\mu\text{mol}/\text{s}$
Input Voltage	220-240V AC
Voltage	1.3-1.4A
Chip	Branded LEDs
Mounting Height	$\geq 12"$ (30cm) Above Canopy
Lifetime	50,000hrs
Power Factor	$>90\%$
Colour Rendering Index	90ra
Ambient Temperature	$-25\sim 40^{\circ}\text{C}$
Control	0-10V Control
Certifications	ETL , CE , UKCA
Package Size	610x55x635mm
LED Fixture	580x580x38mm

Spectrum

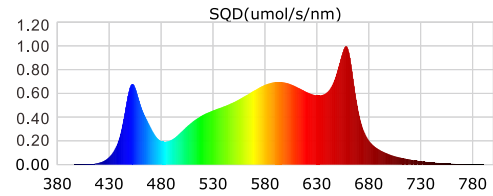

PAR Distribution

