




## Built-in driver

Durable and reliable power source, all in one design.

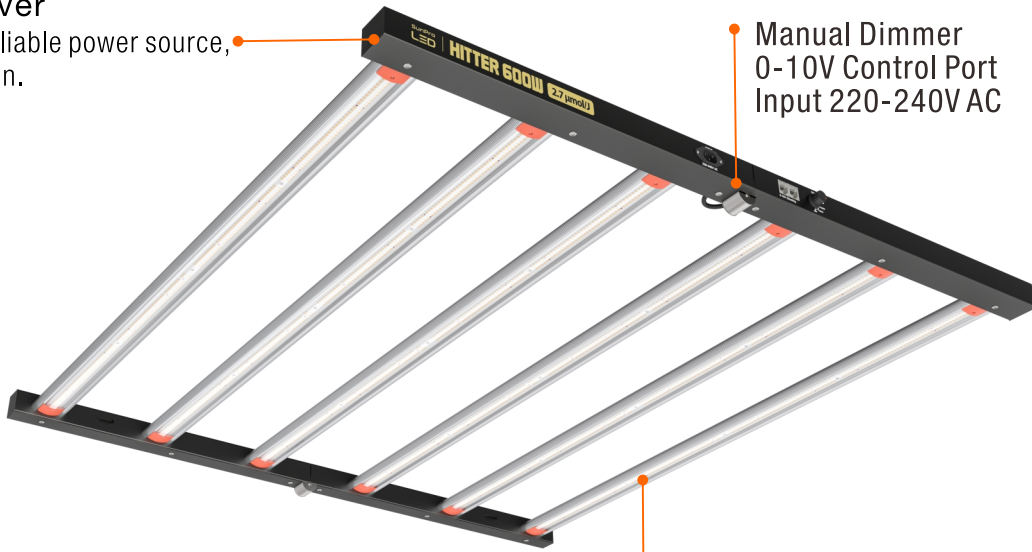

Manual Dimmer  
0-10V Control Port  
Input 220-240V AC




**PC Cover**  
protect the fixture chips from the influence of growing environment


## Specifications

Input Power	600W
Light Bar Qty	6 Bar
Efficacy	2.7 $\mu\text{mol}/\text{J}$
PPF	1620 $\mu\text{mol}/\text{s}$
Input Voltage	220-240V AC
Voltage	2.5-2.7A
Chip	Branded LEDs
Mounting Height	$\geq 12"$ (30cm) Above Canopy
Lifetime	50,000hrs
Power Factor	$>90\%$
Colour Rendering Index	90ra
Ambient Temperature	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA
Package Size	1150x105x570mm
LED Fixture	1110x1065x38mm

## Spectrum

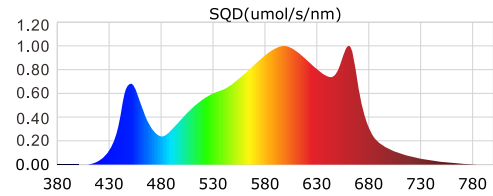


## PAR Distribution

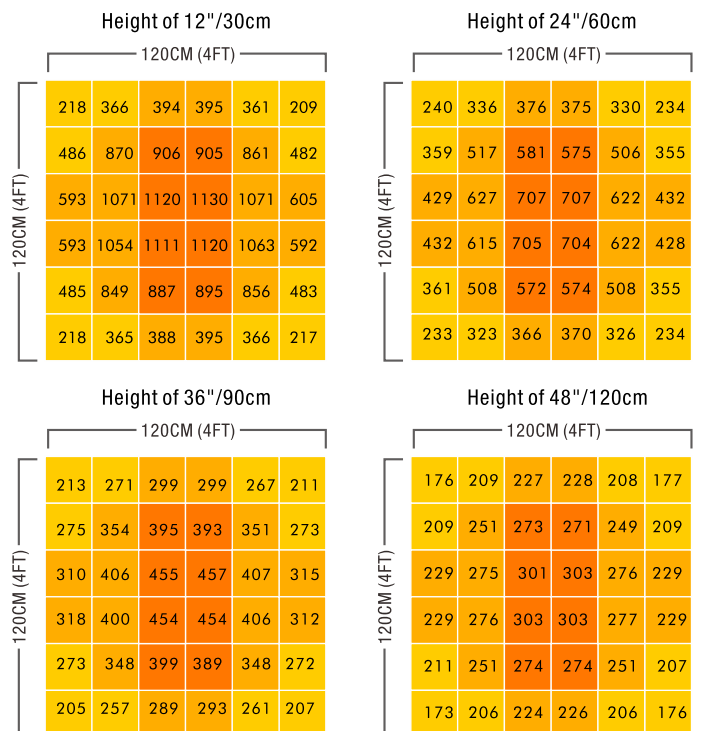



## Built-in driver

Durable and reliable power source, all in one design.

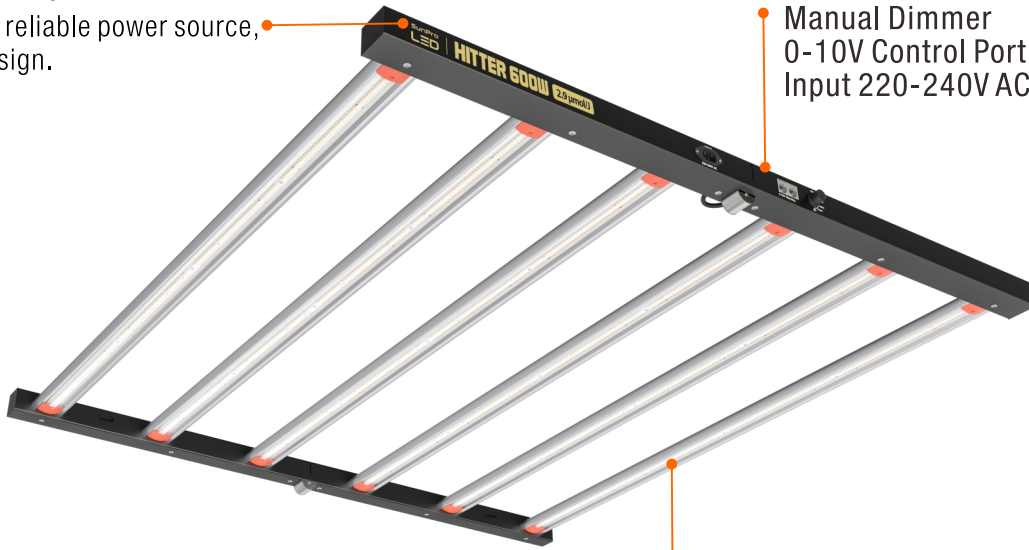

Manual Dimmer  
0-10V Control Port  
Input 220-240V AC




PC Cover  
protect the fixture chips from the influence of growing environment


## Specifications

Input Power	600W
Light Bar Qty	6 Bar
Efficacy	2.9 $\mu\text{mol}/\text{J}$
PPF	1740 $\mu\text{mol}/\text{s}$
Input Voltage	220-240V AC
Voltage	2.5-2.7A
Chip	Branded LEDs
Mounting Height	$\geq 12"$ (30cm) Above Canopy
Lifetime	50,000hrs
Power Factor	$>90\%$
Colour Rendering Index	90ra
Ambient Temperature	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA
Package Size	1150x105x570mm
LED Fixture	1110x1065x38mm

## Spectrum

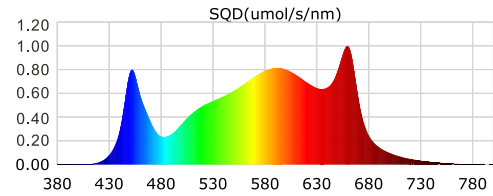

## PAR Distribution

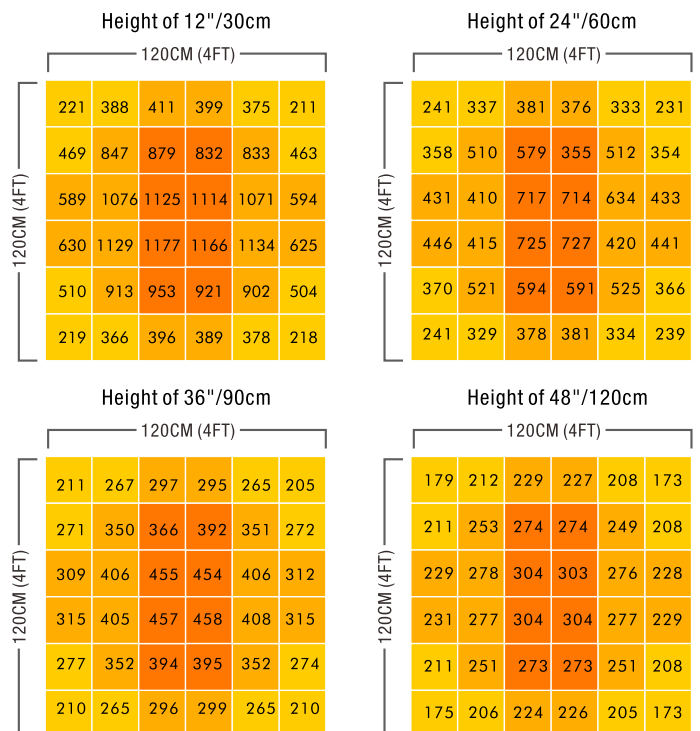



## Built-in driver

Durable and reliable power source, all in one design.



Manual Dimmer  
0-10V Control Port  
Input 220-240V AC




PC Cover  
protect the fixture chips from the influence of growing environment

## Specifications

Input Power	600W
Light Bar Qty	6 Bar
Efficacy	3.1 $\mu\text{mol}/\text{J}$
PPF	1860 $\mu\text{mol}/\text{s}$
Input Voltage	220-240V AC
Voltage	2.5-2.7A
Chip	Branded LEDs
Mounting Height	$\geq 12"$ (30cm) Above Canopy
Lifetime	50,000hrs
Power Factor	$>90\%$
Colour Rendering Index	90ra
Ambient Temperature	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA
Package Size	1150x105x570mm
LED Fixture	1110x1065x38mm

## Spectrum

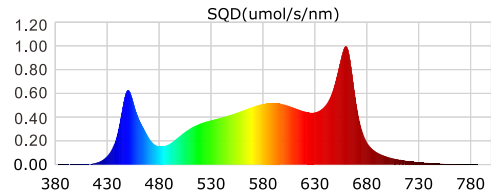

## PAR Distribution

